



We have an eye on the market for you

PUSHLOCK PLUG-IN HOSES

Assembly Instructions

Preparation

- + The hose and hose nozzle must be free of oil and grease!
- + Clean the Hose nozzle and Hose end with alcohol if necessary.

For easier installation, the size of Plug-in hose nozzle and hose on each other must be coordinated. Clean the Hose nozzle and Hose end with alcohol if necessary.



During the assembly, no impermissible mechanical loads such as bending, torsion, stretching may be exerted on the plug-in hose.

Do not use any additional hose attachments such as hose clamps, ear clamps, crimp sleeves, etc.


Do not use lubricants such as oil, grease or other lubricants.

Disassembly of hose and hose nozzle



When dismantling, pay particular attention to make sure that the hose nozzle is not mechanically damaged or scratched (avoid knife or saw cuts).

Recommended PushLock plug-in hose nozzle

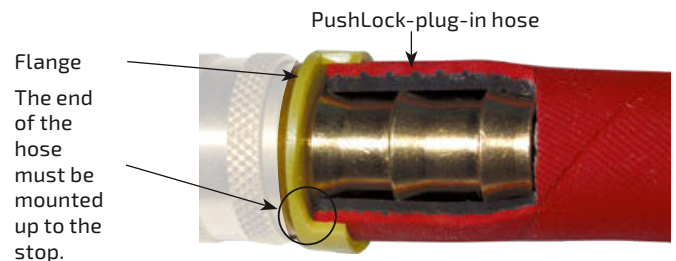

Assembly

- + When cutting the hose to length it is essential to ensure a smooth cut and to use a hose cutter (e.g. SAS 28, can be ordered via our Nonnenmann industrial supplies online shop).
- + The assembly of the hose must only be installed at room temperature.
- + For easier mounting of the hose nozzle moisten the hose with a mixture of normal, cold tap water (10°C - 20°C) and moisten with commercially available detergent.
- + Hose tightly up to the stop (yellow flange) push it onto the Push-Lock hose nozzle and then pull it back firmly once. When pushing, push against a stop (tool, vice or similar) and ensure a firm, secure stand.



CONTACT

✉ normalien@nonnenmann-gmbh.de

☎ +49 (0) 71 81 / 40 87-222



Product video Pushlock

www.youtube.com/
watch?v=e_BUYbSXMSE

